

Car Seat Cover Installation Instructions

Our Highback Seat Cover Fits



or



Our Highback Superfit seat cover fits either a **Highback bucket seat** or a **Lowback bucket seat** with the headrest attached.

Our Lowback Seat Cover Fits



Our Lowback Superfit seat cover fits a **Lowback bucket seat** with a removable headrest. (The Velcro opening makes headrest installation easy).

Step 1. Pull the hood of the seat cover over the top of the seat. If you are installing a lowback seat cover on a lowback seat, first open the Velcro opening in the top of the seat cover. (Tip: Remove the headrest before installing the lowback).




Step 1

Step 2. Smooth the seat cover to fit the backrest by pressing the cover between the seat and backrest as shown.



Step 2

Step 3. Pull the center straps between the seat and backrest and then **CAREFULLY** reach under the seat and attach the hooks to the bottom of the seat. Take care, as sudden release of the elastic strap could cause injury.

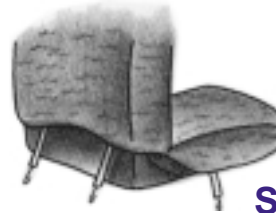

Step 3

Step 4. Pull the seat cover and the skirting material over the front of the seat and fit snugly all around. Creases may be smoothed out to the sides and between the seat and backrest with hands. Excess creases should be pressed into the crack.



Step 4

Step 5. To prevent covering the side seat controls, tuck the side skirting material behind the cosmetic plastic plate, on the outside of the seat. This will help secure the skirting material, prevent shifting and give the cover a snugger fit.



Step 5

Step 6. **CAREFULLY** attach the hooked straps to the underside of the seat as shown. (Tip: The two side straps can be hooked together behind the back of the seat).



Step 6

Step 7. For Lowback seat covers only.

After checking that the seams of your seat cover are aligned with the seat, locate the Velcro flap on the top of the seat cover. Now **CAREFULLY** cut notches in the Velcro flap to accommodate the headrest post - using a sharp knife or scissor. Close up the Velcro opening around the headrest.



Step 7

Warning


Placing a cover on a seat containing an air bag may interfere with the deployment of the bag in an accident, causing or contributing to serious personal injury.

Do not use a cover on such a seat unless you have first determined that it is a model which has been designed to work in your make and model of car. If you are uncertain of this, contact Cloud Nine Sheepskin at 1800-989-7921 or cloud9@sheepskin.com **BEFORE INSTALLING** the cover to determine if it is the correct model to avoid such a hazard.

Cloud Nine Sheepskin Installation Tips

Shoulder Harness Bracket Removal

If your seats have shoulder harness brackets located on the side of the seat backrest, you must first remove the brackets in order to install the seat cover.

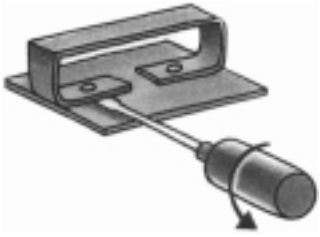

Tools Needed: *Straight head screwdriver - Phillips head screwdriver -Socket wrench*

1. Insert a straight head screwdriver about 1/4 inch under either side of the bracket.
2. Gently turn the screwdriver, applying pressure between the base and the bracket. **Be careful**, too much pressure may break the bracket.
3. After the first half of the bracket has been removed, the other half will slide out easily to expose 2 phillips head screws or 2 bolts.
4. Remove screws with Phillips head screwdriver or bolts with socket wrench and lift off the base section.
5. Install the seat cover. Next, simply feel for the original screw holes and make a small slit in the skirting material over the screw holes. Now reinstall the bracket over the opening in the skit material.

Step 1



Step 1. Raise the armrest to the fully upright position.
Note: If you have two armrests, you can only do this procedure one side at a time.
Next pull the hood of the seat cover over the top of the seat .

Captains Chairs & Armrest Install Tips

Step 2



Step 2. Pull the seat cover over the upright armrest. Continue pulling and working the seat cover down snugly over the seat and the armrest, until the armrest is completely covered with the skirting material.


Step 3




Step 3. Work the seat cover down completely over the armrest until the skirting material is just below the bottom of the upright armrest. Check the alignment of the seat cover seams to be sure they line up properly with the seat.
Next determine the pivot point of the armrest. (Where the bolt joins the armrest to the seat). This is spot where you will make a slit.

Step 4. Now **carefully** make a small slit in the skirting material across the width of the armrest, with a sharp knife or razor blade. Make the opening just big enough for the armrest to fit through.
Note: Cutting the skirting material will not hurt it or cause it to unravel.

Step 4

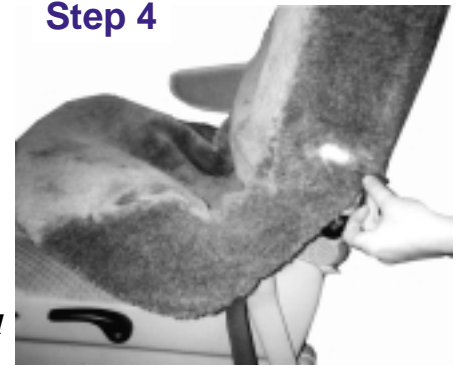

Step 5

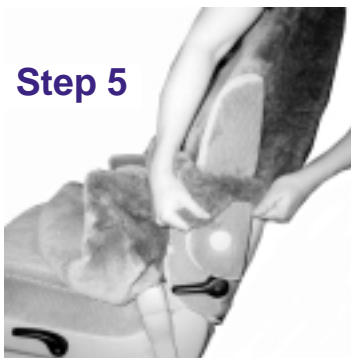

Step 5. Now lift the seat cover back up above the top of the armrest (Like picture in Step 1). Then pull it down again, allowing the armrest to poke through the opening in the skirting material you just made. Work the cover down completely, until the skirt slides under the armrest, allowing the armrest to pivot freely.

Step 6. If necessary, repeat steps 1 thru 5 for a second armrest. Complete the installation of the seat cover. (See reverse side for details).
Note: It is O.K. to make additional slits in the skirting material for additional controls and levers.

Step 6



1 Year Limited Warranty

Cloud Nine Sheepskin™ seat covers are warranted to be free from defective materials or workmanship for a period of 1 year from the date of purchase. **Please Note:** Since color dyes may change or fade, this sheepskin seat cover will not be replaced for, or otherwise warranted against any change in color. A possible marking of color could occur when dark colored seats are fitted to a light colored upholstery. Under these circumstances, we suggest that a piece of cloth be placed between the seat and the cover to prevent any possible discoloration. Purchaser assumes responsibility. We do not recommend washing and do not warranty covers that have been washed.